

Help!

Contents

1	Preliminary note	1
2	Installing and uninstalling	1
3	Using Create Synchronicity to backup / synchronize your files	1
3.1	Selecting a language	1
3.2	Main window	2
3.3	Settings window	3
3.3.1	Selecting a synchronization method	4
3.3.2	Selecting files and folders.	4
3.3.3	Supported path formats (v3.5+)	4
3.3.4	Including or excluding specific files (v3.0+)	5
3.3.5	Advanced Settings	5
3.4	Scheduling	5
3.5	Preview	6
3.6	Synchronization	7
3.7	Command line	7
3.7.1	Available commands	7
3.7.2	Warning	8
3.8	Advanced use	8
3.8.1	Syncing to network drives	8
3.9	Special commands, hidden settings	8
3.9.1	Enabling expert mode (v5.1+)	8
3.9.2	Note about hidden settings	8
3.9.3	Dealing with messy DST settings	9
3.9.4	Grouping profiles	9
3.9.5	Auto-creating root destination directory (Expert mode only)	9
3.9.6	(v6.0+) Excluding hidden files and folders	9
3.9.7	Using regular expressions to exclude specific folders	9
3.9.8	Auto-including newly created folders (in some edge cases)	9
3.9.9	Forcing stronger checks while scanning for modified files (v5.2+)	10
3.9.10	Diff / File comparison (v5.2+)	10
3.9.11	On-the-fly compression (gzip and bzip2) (v5.2+)	10
3.9.12	Md5 Validation (v5.2+)	10
3.9.13	Text-only logs (v5.2+)	10
3.9.14	Specifying how many log entries should be archived (v5.2+)	10
3.9.15	Wake-up actions, post-sync actions (v6.0+)	10
3.9.16	Forecasts	11
3.10	Server builds / System admins (v5.0+)	11

3.11 Running Create Synchronicity under Linux	11
4 Appendix: keyboard shortcuts.	12
4.1 Main window	12
4.2 Preview window	12
5 Legal notes	12
6 Further help	12
6.1 Bugs	12
6.2 Feature requests	12
6.3 Questions/Contact	12
7 Mailing lists	13

1 Preliminary note



Create Synchronicity is open source! This means that it is developed by volunteers only, and thus developers thankfully accept [donations](#), which are a very nice way to show you support to an open source project.

2 Installing and uninstalling

Create Synchronicity can either be installed to your hard drive, or launched without installing from a Zip archive.

Tip: Uninstalling Create Synchronicity prior to updating is not needed.

3 Using Create Synchronicity to backup / synchronize your files

Create Synchronicity has been designed to backup and synchronize your files and folders in a fast and simple way, through a light and yet powerful interface. It is fully portable, and weights about 180 kB zipped.

Windows 2000, Windows XP, Windows Vista, and Windows Seven are supported. To run Create Synchronicity, you must install the .Net Framework, version 2.0 or later.

3.1 Selecting a language

To change Create Synchronicity language, go to the “About/Settings” menu, select your language, and restart the program. If your language is not included, why not [translate Create Synchronicity by yourself](#)?

3.2 Main window

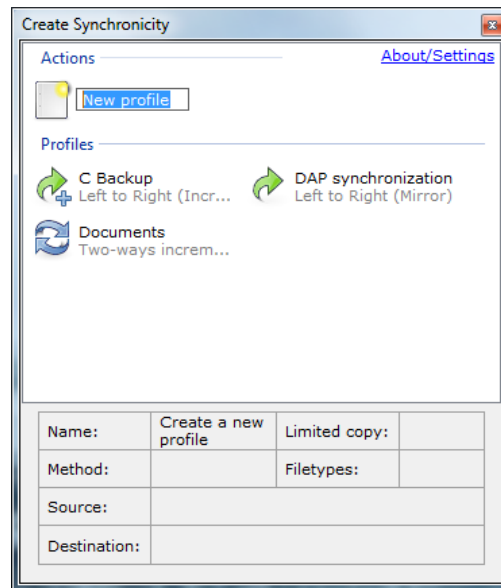


Figure 1: Create Synchronicity - Main (Win7)

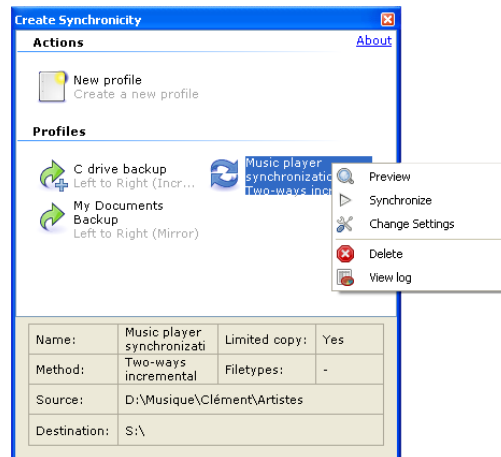


Figure 2: Create Synchronicity - Main

Create Synchronicity's main window displays all existing configurations, illustrated by an icon showing what they are intended to do. Details about the selected configuration ("profile") are displayed in the bottom of the window when you click the name of a profile.

To *create a new profile*, click the "New Profile" icon.

To *rename a profile*, right-click it or use the F2 key.

To display available actions for an item, just click it.

Multiple actions are displayed:

- *Preview*: loads a preview of the actions to apply to the file system to synchronize the folders that you have selected.
- *Synchronize*: starts synchronizing directly, without displaying a preview.
- *Change Settings*: displays the configuration window.
- *Delete*: deletes the profile.
- *Rename*: renames the profile.
- *View log*: displays a log of all backups done.
- *Clear log*: clears the profile log.
- *Scheduling*: displays more option about scheduling your backup profile.

Note: You can change views, or change font size, using [keyboard shortcuts](#).

3.3 Settings window

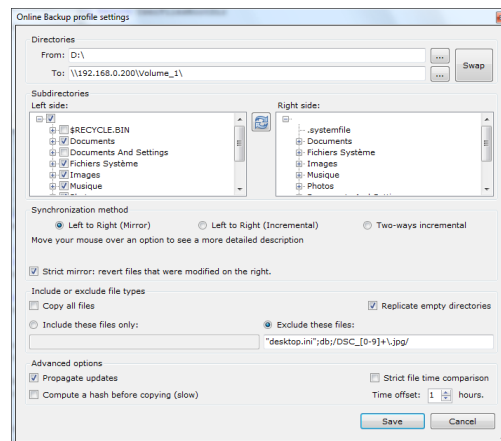


Figure 3: Create Synchronicity - Settings (Win7)

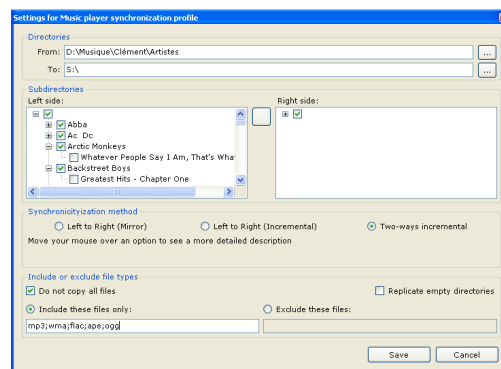


Figure 4: Create Synchronicity - Settings

3.3.1 Selecting a synchronization method

Create Synchronicity features three *synchronization methods*, which define how the program will deal with newly created and deleted files.

- *Left to right (Mirror)*: New and modified files are copied from left to right. Deletions that occurred on the left are replicated (“mirrored”) on the right. In this case, the right folder becomes an exact copy of the left one, except that files updated on the right side are not reverted to their original state¹.
- *Left to right (Incremental)*: New and modified files are copied from left to right, but deletions are not. In this case, the right folder somehow keeps an incremental history of changes that occurred on the left.
- *Two ways (Incremental)*: New and modified files are copied from left to right, and from right to left. No deletions occur. This is especially useful if changes occur also in the destination (eg. your documents on a USB stick)

¹ Unless “strict mirror” is selected.

The **Strict mirror** option ensures that the right side remains an *exact* copy of the left one: when enabled, if Create Synchronicity detects changes in the destination, then it *reverts* the file to its original state; that is, it removes the modifications and resets the files contents to match that of the original file.

3.3.2 Selecting files and folders.

The [tutorial](#) has plenty of extra information.

- (v4.0+) The default action when selecting a folder is to include *all its subfolders*.
- A *tick* before the name of a folder means that the *files* in this folder will be synchronized.
 - Subfolders won’t be backed up, unless they are checked too.
- Right-clicking a folder will give you a list of options to finetune your selection.

Note: By right-clicking a node, you’ll be able to synchronize a folder’s contents without synchronizing its subfolders, a feature specific to Create Synchronicity.

Note: Create Synchronicity does not recreate the source root folder (ie. if you’re syncing from C:\A to C:\B, then you won’t get a C:\B\A folder).

3.3.3 Supported path formats (v3.5+)

You can use the following path formats:

- Absolute (C:\MyFolder)
- Relative (..\..\MyFolder)
- UNC (\\192.168.0.150\MyFolder)
- By Volume Name (Enclose volume name in quotes : "MyDrive"\MyFolder)

Environment variables such as %UserProfile% are automatically expanded. Expert users can use dynamic variables such as %DAY%, %YEAR%, etc. See [further](#).

3.3.4 Including or excluding specific files (v3.0+)

You can include or exclude files by name, extension, or by creating a regular expression to match the name/extension. Separate patterns using semicolons.

- To include / exclude files by extension, use the extension, without quotes.
Example: to exclude tar and zip files, type in the exclude box `tar;zip`.
- To include / exclude a file by name, use the name enclosed in quotes, with the extension.
Example: `"Hello.exe";"Report.doc"`.
- To use a regexp (regular expression), enclose it in forward slashes (/).
Example: `/Picture[0-9]+\.(jpg|raw|png)/`.

(v6.0+) To exclude hidden files, see the [Advanced section](#).

3.3.5 Advanced Settings

The `Time offset` option (v2.2+) is useful when your computer time has changed (for example during daylight saving time). For example, when adding a one hour time offset, Create Synchronicity adjusts file times (by adding one hour) before comparing them.

The `Strict file time comparison` option (v3.0+), when disabled, makes the file time checking which Create Synchronicity uses to determine which files should be copied a little bit looser: file times are the allowed to differ by up to 4 seconds (disable this to fix weird FAT/NTFS related bugs).

Unchecking `Replicate empty directories` will exclude empty folders from the synchronization. Unchecking `Propagate updates` will exclude updated files from future synchronizations. Both of these settings should remain checked in most situations.

3.4 Scheduling

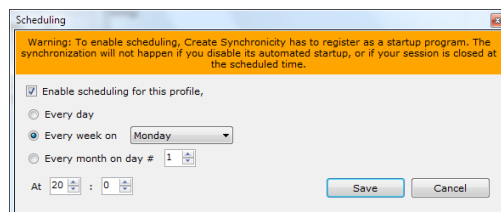


Figure 5: Create Synchronicity - Scheduling

You can choose between three scheduling options:

- *Every day* at a specific time.
- *Every week* on a specific week day, at a specific time.
- *Every month* on a specific month day, at a specific time.

Create Synchronicity will automatically start the scheduler when needed. Likewise, if you disable scheduling for all profiles where it was previously enabled, then the program will unregister from your startup list.

(v5.1+) When the “catch up” setting is enabled, Create Synchronicity will run any synchronization that was postponed by more than two days. That is, if a backup was supposed to occur on January 1st, 5 PM, and then computer was not powered at that time, then from January 7, and until the backup has successfully been started, Create Synchronicity will periodically try to start it.

(v5.2+) *Note:* Create Synchronicity will only mark a profile as caught up if the synchronization completes. If the computer is turned off, or if the backup is cancelled before completion, then Create Synchronicity will mark the profile for catching up at next boot, or 4 hours later, whichever comes first.

Note: When you turn scheduling on, Create Synchronicity registers as a startup program, which runs in background. You can see if Create Synchronicity is running by checking for the double arrow icon in your status bar.

Note: When multiple profiles are scheduled, Create Synchronicity will run them sequentially; that is, it will wait for the first scheduled synchronization to end before launching the second, and so on. For example, if Profile1 is scheduled to run at 10:00, and Profile2 at 10:05, then Profile2 will not start before Profile1 has finished synchronizing. Of course, if Profile1 completes before 10:05, Profile2 will run at 10:05. If the behaviour is not desired, you may force multiple profiles to run simultaneously by combining the Windows Tasks Scheduler and the `/run` command line switch.

3.5 Preview

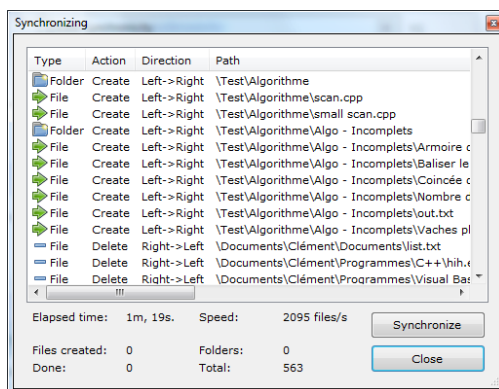


Figure 6: Create Synchronicity - Preview

A list of all actions which will be executed by Create Synchronicity is displayed, so that you can review these changes before applying these actions.

3.6 Synchronization

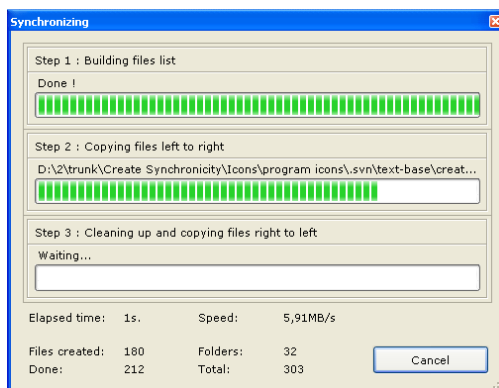


Figure 7: Create Synchronicity - Synchronizing

It is always possible to stop synchronizing after you started. However, already copied files are not deleted, and deleted files are not recovered.

3.7 Command line

Create Synchronicity can be started from the command line. To do so, head to the program's installation folder and type in a command prompt "Create Synchronicity.exe" [command].

3.7.1 Available commands

- `/help` (v5.0+) will display information about the program, and where the configuration files are stored.
- `/scheduler` will run the scheduling engine in background. Useful if you need to immediately (re)start the scheduler.
- `/log` (v5.0+) will enable application logging, to a file called `app.log` in the application installation directory.
- `[/preview] [/quiet|/silent] [/nostop] /run [/all] "ProfileName1|ProfileName2|ProfileName3"` will queue (v3.5+) profiles `ProfileName1`, `ProfileName2`, etc. for synchronization, optionally displaying a preview for each. Use `/all` instead of profile names to sync all profiles.
 - `/preview` will display a preview before syncing.
 - `/quiet` will minimize the program to an icon in the system tray.
 - `/silent` (supersedes `/quiet`; system admins only) will prevent the program from interacting with the desktop in any way. Application logging is enabled (see `/log`).
 - `/all` (v6.0+) will sync all profiles.

- *Note on queuing profiles:* Create Synchronicity will wait 5 seconds before moving from one profile on to the next. When queuing profiles, ensure that you use quotation marks, and that you separate profile names with a pipe character (eg. `Create Synchronicity.exe /run "One|Two"`). If you do not use the `/quiet` switch, Create Synchronicity will wait for a confirmation after running each profile, unless you add the `/nostop` switch.

The program will exit after completing its tasks.

3.7.2 Warning

It's highly recommended to test your backup settings before running profiles from the command line.

3.8 Advanced use

3.8.1 Syncing to network drives

(v3.5+) Create Synchronicity has native support for UNC paths, ie. paths such as `\\192.168.0.25\My-RootFolder\MyFolder`.

Create Synchronicity can easily be used to *backup or sync files to a network drive*: to do so, you can directly use (v3.5+) a UNC path. You can also map your network drive to a particular letter for easier access: right-click “My Computer” and use the “connect a network drive” option. Choose a letter for your drive, and synchronize to this drive. A [more detailed](#) help on this procedure is available from Microsoft.

3.9 Special commands, hidden settings

See also the [FAQ](#).

This section may describe unreleased features. Should you need such features, please download an [updated build](#).

3.9.1 Enabling expert mode (v5.1+)

You can enable a few extra options by adding `Expert mode:True` to your `mainconfig.ini` file, or by pressing `Ctrl+Alt+E` in the main window.

Starting from revision 1130, enabling expert mode adds an extra menu to the basic settings window, which lets you configure some of the settings mentioned in this section.

3.9.2 Note about hidden settings

Most of the following sections of this guide describe manual modification of your configuration files. These files are located in the `config` folder of your installation directory, and follow a `profilename.sync` naming convention. Modifications are usually limited to appending a line to the corresponding config file.

Note: Some of the following tweaks require enabling expert mode.

Tip: Pressing `Ctrl+0` in the main window will open the folder where your profiles are stored.

3.9.3 Dealing with messy DST settings

Create Synchronicity has a DST compensation setting. You might however - especially if many of your files differ by +/-1 hour from the source - want to use the “fuzzy DST” setting, enabled by adding `Fuzzy DST compensation:True` on a separate line to the corresponding `profilename.sync` file.

3.9.4 Grouping profiles

You can reorganize profiles and group them by adding `Group:(GroupName)` on a separate line to the corresponding `profilename.sync` file, or by using the expert menu in the profile configuration window.

3.9.5 Auto-creating root destination directory (Expert mode only)

In Create Synchronicity, the `%DATE%` environment variable is mapped to the current date, with - as date separator. If you want to backup to a dynamic destination, based on current date, you can use this constant in your destination path. You must, however, tell Create Synchronicity to automatically create the root directory when starting a sync; the corresponding setting is available in the profile settings dialog, in expert mode only. Other variables include `%MMMMYYYY%`, `%DAY%`, `%MONTH%`, and `%YEAR%`.

3.9.6 (v6.0+) Excluding hidden files and folders

To exclude hidden files and folders, add `Exclude hidden entries:True` on a separate line of your `profilename.sync` file.

3.9.7 Using regular expressions to exclude specific folders

Using the same syntax as described in the [regular expressions](#) section of this manual (.Net regular expressions), you can force Create Synchronicity to exclude some specific folders. To do so, simply add the following line to your profile configuration file: `Excluded folder patterns:"\a";"\SVN";`. In the previous example, any directory *ending with* `\a` or `\SVN` will not be synced.

Note: Although source directories matching the exclusion pattern will not be created or updated in the destination, existing ones will not be removed. You can hence safely exclude system folders (e.g. `System Volume Information`).

3.9.8 Auto-including newly created folders (in some edge cases)

Suppose you are syncing from `C:` to `D:`, and you don't want certain folders, say `C:\a` and `C:\b` to be copied to `D:`. You should first create a profile where you uncheck `C:\a` and `C:\b`. But then, if you create a folder at `C:\c`, Create Synchronicity won't be able to guess if it should be synced, and will default to not syncing it. On the opposite, if you had included all subfolders of `C:`, Create Synchronicity would include it as well. If you want newly created folders to be included anyway, you should take a different approach: select all `C:` subfolders, and then add the following line to your configuration file: `Excluded folder patterns:"\a";"\b"`. Then Create Synchronicity will know that it should ignore folders `C:\a` and `C:\b`. You can even use regular expressions (using the same syntax as the one defined for including and excluding files). Please note that, if they exist, `D:\a` and `D:\b` won't be deleted.

3.9.9 Forcing stronger checks while scanning for modified files (v5.2+)

Create Synchronicity uses last modification date to compare files and determine which should be synchronized. If you want file size too be scrutinized as well, then add `Check file size:True` to your [sync profile](#).

3.9.10 Diff / File comparison (v5.2+)

Create Synchronicity can show a diff of modified files. For this, you'll need to set two hidden settings, `Diff program` and `Diff arguments` in your `mainconfig.ini` file. The first should point to your diff program ; the second should list both `%o` (expands to the path to the original file), and `%n` (expands to the path to the new file).

Example: you can add the following to your `mainconfig.ini` file: `Diff program: C:\Program Files\TortoiseSVN\bin\TortoiseMerge.exe;Diff arguments:"%o" "%n"`.

Press `Ctrl+D` in the preview window to launch your diff program.

3.9.11 On-the-fly compression (gzip and bzip2) (v5.2+)

You can use Create Synchronicity to create compressed backups – that is, save gzipped, or bzip2'ed copies of your files instead of the files themselves – by adding `Compress:.gz`, or `Compress:.bz2` on a new line of the corresponding profile configuration file. You'll need to extract the extension pack downloadable from the [latest builds page](#) to the root of your installation directory prior to using this feature.

Note: This feature is still experimental, and should not be used but by experts.

3.9.12 Md5 Validation (v5.2+)

For extra safety, you can force Create Synchronicity to validate files after copying. The algorithm used is md5.

To enable this feature for a profile, add `Checksum:True` on a new line of the corresponding profile configuration file.

Enabling this option will actually enable two tests: one while scanning for modified files (preview phase), to ensure absolute backup integrity, and one after copying your files. In case a verification fails, a message will be added to the log file.

3.9.13 Text-only logs (v5.2+)

Should you prefer your logs to be saved as text instead of html, append `Text logs:True;` to your main configuration file.

3.9.14 Specifying how many log entries should be archived (v5.2+)

The default in Create Synchronicity is to keep 7 entries in the log files. You can customize this behaviour by appending `Archived log entries:n;` in your main configuration file.

3.9.15 Wake-up actions, post-sync actions (v6.0+)

Create Synchronicity can run scripts when starting or completing a synchronization, provided that expert mode is enabled. These scripts are profile-specific, and are enabled by adding `Wakeup ac-`

`tion:path-to-script` or `Post-sync action:path-to-script` to the corresponding profile configuration file (`profilename.sync`). Wake-up scripts are called in a blocking way, while post-sync scripts are called in a non-blocking way. In both cases, the script receives only one parameter, the absolute path to the destination.

3.9.16 Forecasts

For performance reasons, Create Synchronicity doesn't read file size information when scanning for new, modified, or deleted folders. This yields a substantial improvement, but does have a cost: Create Synchronicity doesn't estimate how long a backup will take.

3.10 Server builds / System admins (v5.0+)

A special command-line switch is available, `/silent`, that slightly changes the behaviour of the `/quiet` command, and enables application logging, so that no interaction happens at all (message boxes and balloons are disabled). This switch is mainly designed to ease the work of system administrators, who want to schedule Create Synchronicity with the default Windows tasks scheduler, thus bypassing Create Synchronicity's custom scheduling engine.

Important note: This switch has been designed to minimize the interaction required. System administrators are strongly advised to have a look every now and then to the `app.log` file, in order to make sure that nothing is preventing the backups from happening.

Note to Windows 7 users: You may need to run this software in *Administrator Mode* for the synchronization to work perfectly.

3.11 Running Create Synchronicity under Linux

Support for Linux-based operating systems was added in revision 1127, using the Mono stack.

A special, up-to-date Linux build is available from the [latest builds](#) page. This version is purely experimental; extensive testing is required before it can be safely used by everyone.

For now, this version is restricted to early testers: it notably lacks scheduling, proxy support (due to mono limitation), and doesn't integrate well in the Gnome desktop.

4 Appendix: keyboard shortcuts.

4.1 Main window

Shortcut	Action
Enter	Launches a preview for the profile currently selected
F1	Opens this manual
F2	Starts renaming the current profile
F5	Reload profiles
Ctrl+N	Creates a new profile
Ctrl+L	Cycles through display modes
Ctrl++	Zooms in
Ctrl+-	Zooms out
Ctrl+O	Opens the <code>config</code> folder.
Ctrl+Alt+E	Toggles expert mode

4.2 Preview window

Shortcut	Action
Ctrl+L	Opens the log file
Ctrl+D	Opens a diff between the current and previous version of the selected file (see advanced settings).

5 Legal notes

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

6 Further help

6.1 Bugs

As much as I try to avoid it, there may still be bugs in Create Synchronicity. If you think you found one, please to take the time to send me a bug report, at [sourceforge tracker](#). If you don't want to create an account, you can [e-mail me directly](#).

6.2 Feature requests

There is a [feature requests tracker on SourceForge](#). You can also e-mail me, of course.

6.3 Questions/Contact

If you have any questions regarding Create Synchronicity, you can [send me an e-mail](#) (`createsoftware@users.sourceforge.net`). In case of problems, I've set up an alternate e-mail address: `createsoftware.proxy AT gmail.com`.

7 Mailing lists

Two mailing lists have been created, which are designed for announcements only: [synchronicity-updates](#), announcing major updates, and [synchronicity-commits](#), listing commits.